

## MADRID DOWNLIGHTS 5" Low Glare Design




### FEATURES

Madrid LED downlights are available in 5" model size with low glare design. Ideal for high ceiling applications in retail, commercial and educational. Superior crisp optics at 45°<sup>1</sup> or 60°<sup>2</sup> with 90 CRI delivers a unique glow with vivid color. Easy installation and service from below ceiling.

### LUMINAIRE INFORMATION

RECESSED

Product Detail	
Lumens/Watts	1800lm/20W 2700lm/30W 4500lm/50W
Input Voltage	120-277V
Efficacy	Up to 120lm/W <sup>3</sup>
CRI	>90Ra
Beam Angle	45° <sup>1</sup> , 60° <sup>2</sup>
CCT	3000K, 3500K, 4000K
Dimming	1% 0-10V
Trim Colour	<b>White (Standard)</b> , Black, Grey
Ingress Protection	IP20 Dry Location
Warranty	5 yrs
Certification	

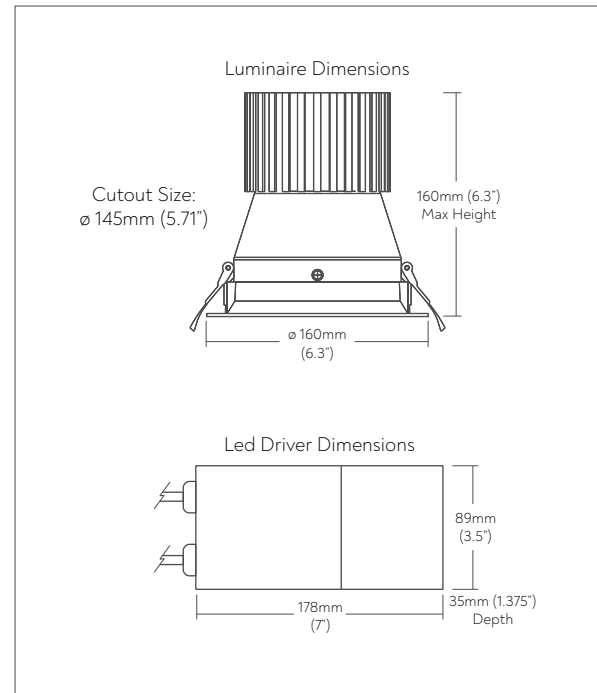

### ORDER CODE

<b>MAD5</b>	-		-		-	<b>90</b>	-	<b>UNV</b>	-	<b>D</b>	-	<b>CL</b>	-	
<b>MODEL</b>		<b>LUMENS/ OPTICS</b>		<b>CCT</b>		<b>TRIM FINISH</b>		<b>CRI</b>		<b>VOLTAGE</b>		<b>DIMMING</b>		<b>LENS</b>
<b>MAD5 - 5 INCH</b>		<b>18 - 1800lm/60°</b>		<b>30K - 3000K</b>		<b>WH - WHITE (Standard)</b>		<b>90 - 90CRI</b>		<b>UNV - 120-277V</b>		<b>D - 0-10V</b>		<b>CL - CLEAR</b>
		<b>27 - 2700lm/60°</b>		<b>35K - 3500K</b>		<b>BK - BLACK</b>								<b>NEW CONSTRUCTION PLATFORM</b>
		<b>45 - 4500lm/45°</b>		<b>40K - 4000K</b>		<b>GR - GREY</b>								<b>(BLANK) - NONE</b>
														<b>NCR1 - ADJUSTABLE</b>
														<b>2" - 6" ROUND</b>

1. Available in 4500lm only  
2. Not available in 4500lm  
3. Lumens measured without optics