

MURANO DOWNLIGHTS

3", 5", 6" Euro Collection



FEATURES

The Murano is a high-performance recessed downlight offering reduced glare and high visual comfort. Available in round 3" fixed or 5" and 6" adjustable, the Murano is one of the most flexible downlights in the market. Its modular design with a variety of light engines and optics allows for suitable use in countless applications. This downlight is designed for easy installation, removal, and maintenance from below the ceiling to reduce capital and operating costs. The Murano is ideal for ambient or accent lighting in commercial, retail, hospitality, and residential settings.

LUMINAIRE INFORMATION

RECESSED



Product Detail



Lumens/Watts
(3000K)

1100lm/15W¹ - 3 & 5 Inch (Standard)
2000lm/25W² - 5 Inch (Standard)

1700lm/20W² - 5 Inch

2400lm/28W³ - 6 Inch

2800lm/34W³ - 6 Inch

Input Voltage

120-277V

Efficacy

Up to 90lm/W

CRI

>90Ra

Beam Angle

55° (Standard), 24°, 38°

CCT

3000K, 3500K, 4000K

Dimming

0-10V (20W-34W Standard), Phase
Dimming 10-100% (15W Standard),
Dual (Consult Factory)

Trim Colour

White (Standard), Black, Silver


Ingress Protection

IP20 Dry Location, Wet Location Option⁵ (3in)

Warranty


5 yrs

Certification

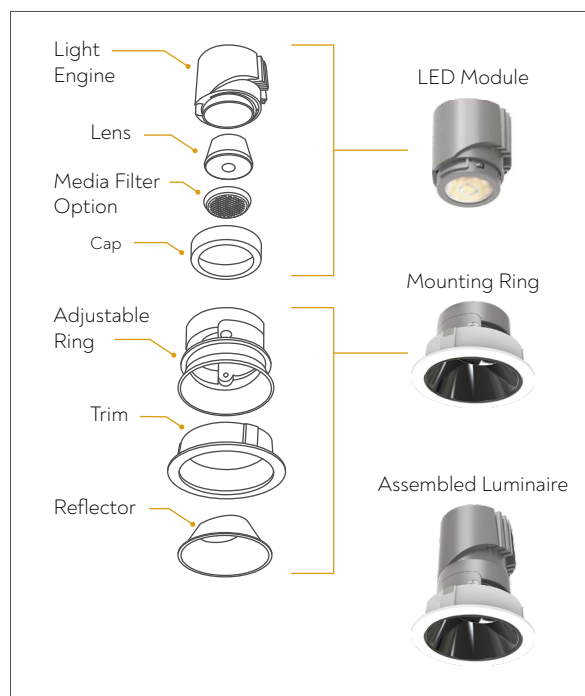


DIMENSIONS

Euro Collection / Model	D / W	H	Cutout Size D / W
EURO3 / 3 Inch* Murano Round MUR3 (R)	Ø85mm (3.35")	86.5mm (3.41")	Ø75mm (2.95")
EURO4 / 5 Inch* Murano Round MUR5 (R)	Ø125mm (4.92")	112.5mm (4.43")	Ø110mm (4.33")
EURO6 / 6 Inch* Murano Round MUR6 (R)	Ø145mm (5.71")	138.5mm (5.45")	Ø125mm (4.92")

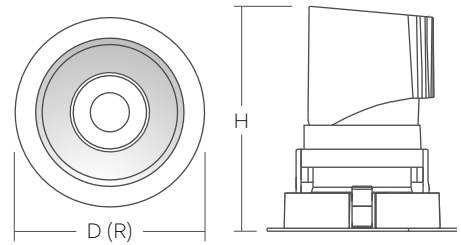

TRIM

DRIVER ENCLOSURE

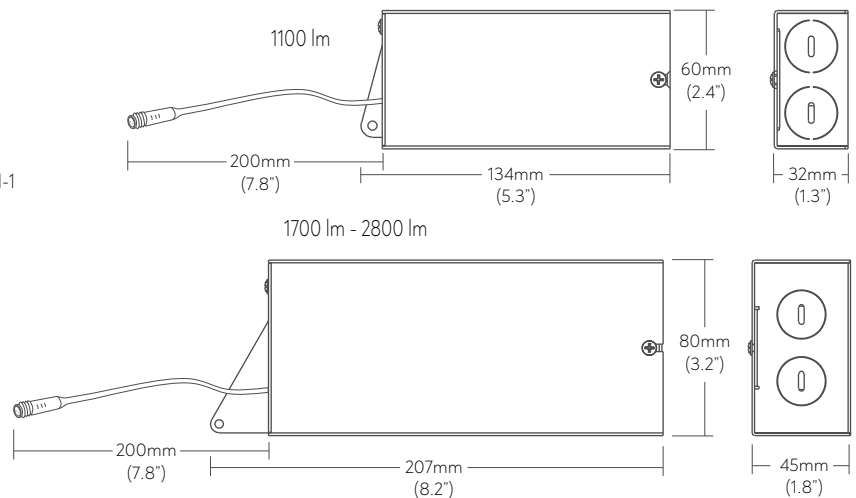

ORDER CODE

MODULE					DRIVER							
	-		-	90	-		-	UNV				
COLLECTION		BEAM ANGLE		CCT		CRI		LUMENS		DIMMING		VOLTAGE
EURO3 - MUR3		55D - 55° (Standard)		30K - 3000K		90 - 90CRI		11 - 1100lm ¹ (EURO3 Standard) (EURO4)		V - 0-10V DIMMING (20W-34W)		UNV - 120-277V
EURO4 - MUR5		24D - 24°		35K - 3500K				20 - 2000lm ² (EURO4 Standard)		T - PHASE DIMMING (15W ONLY)		
EURO6 - MUR6		38D - 38°		40K - 4000K				17 - 1700lm ² (EURO4)		X - DUAL 0-10V & PHASE DIMMING (Consult Factory)		
				Consult factory for other CCT				24 - 2400lm ³ (EURO6)				
								28 - 2800lm ³ (EURO6)				
* Nominal size												
1. Available for 3" & 5" models only												
2. Available for 5" model only												
3. Available for 6" model only												
4. Not available for 3" model												
5. Available for 3" model only												

TRIM						OPTIONS										
	-		-	R	-		-	1	-		-		-			
MODEL		TILT		TRIM		REFLECTOR		TRIM FINISH		# OF HEADS		IP		MEDIA FILTER		NEW CONSTRUCTION PLATFORM
MUR3 - MURANO 3 INCH*		F - FIXED ⁵ AD - ADJUSTABLE ⁴		R - ROUND		CS - CLEAR SPECULAR (Standard)		WH - WHITE (Standard)		1 - 1 HEAD		WL03 - WET ⁵ LOCATION (MUR3) (Consult Factory)		HC - HONEYCOMB SL - SOFT LENS		(BLANK) - NONE
MUR5 - MURANO 5 INCH*						BC - BLACK CHROME (Anti-glare)		BK - BLACK SV - SILVER								NCR1 - ADJUSTABLE 2" - 6" ROUND
MUR6 - MURANO 6 INCH*																NCR2 - FIXED 2" 4" 5" ROUND

ORDER CODE CHART

COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS/ WATTS	DIMMING	VOLTAGE	TRIM MODEL	TILT	TRIM	REFLECTOR	FINISH	# OF HEADS
 EURO3	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1100 lm/15W	10-100%	120-277V	MUR3	FIXED	ROUND	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
 EURO4	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	2000 lm/25W (Standard), 1100 lm/15W, 1700 lm/20W	0-10V (Standard), DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	MUR5	ADJUSTABLE	ROUND	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
 EURO6	55°, 24°, 38°	3000K, 3500K, 4000K	>90Ra	2400 lm/ 28W, 2800 lm/34W	0-10V, DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	MUR6	ADJUSTABLE	ROUND	CLEAR SPECULAR, BLACK CHROME (Anti-glare)	WHITE, BLACK, SILVER	1