

VENICE DOWNLIGHTS

3", 4", 6" Euro Collection




FEATURES

The Venice is a high-performance recessed downlight offering reduced glare and high visual comfort. Available in 3", 4" and 6" round or square trim, fixed or adjustable, the Venice is one of the most flexible downlights in the market. Its modular design with a variety of light engines and optics allows for suitable use in countless applications. This downlight is designed for easy installation, removal, and maintenance from below the ceiling to reduce capital and operating costs. The Venice is ideal for ambient or accent lighting in commercial, retail, hospitality, and residential settings.

LUMINAIRE INFORMATION




RECESSED 

Product Detail	
Lumens/Watts (3000K)	1000lm/15W¹ - 3 Inch (Standard) 1900lm/25W² - 4 Inch (Standard) 1600lm/20W ² - 4 Inch 2200lm/28W ³ - 6 Inch 2700lm/34W ³ - 6 Inch
Input Voltage	120-277V
Efficacy	Up to 90lm/W
CRI	>90Ra
Beam Angle	55° (Standard) , 24°, 38°
CCT	3000K, 3500K, 4000K
Dimming	0-10V (20W-34W Standard), Phase Dimming 10-100% (15W Standard), Dual (Consult Factory)
Trim Colour	White (Standard) , Black, Silver
Ingress Protection	IP20 Dry Location, Wet Location Option ¹ (3in)
Warranty	5 yrs
Certification	


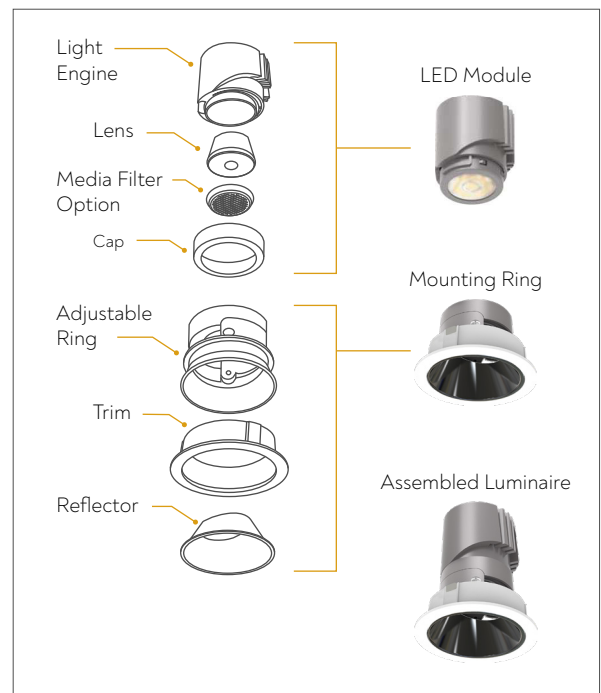


DIMENSIONS

Collection / Model	D / W	H	Cutout Size D / W
EURO3 / 3 Inch* Venice Round VEN3 (R)	Ø85mm (3.35")	113mm (4.45")	Ø75mm (2.95")
EURO3 / 3 Inch* Venice Square VEN3 (Sq)	85x85mm (3.35"x3.35")	112mm (4.41")	75x75mm (2.95"x2.95")
EURO3 / 3 Inch* Venice Wall Wash Round VEN3-WW (R)	Ø88mm (3.46")	100mm (3.94")	Ø75mm (2.95")
EURO3 / 3 Inch* Venice Wall Wash Square VEN3-WW (Sq)	88x88mm (3.46"x3.46")	100mm (3.94")	75x75mm (2.95"x2.95")
EURO4 / 4 Inch* Venice Round VEN4 (R)	Ø115mm (4.53")	141mm (5.55")	Ø100mm (3.94")
EURO4 / 4 Inch* Venice Square VEN4 (Sq)	112x112mm (4.41"x4.41")	136mm (5.35")	100x100mm (3.94"x3.94")
EURO6 / 6 Inch* Venice Round VEN6 (R)	Ø140mm (5.51")	175mm (6.89")	Ø125mm (4.92")
EURO6 / 6 Inch* Venice Square VEN6 (Sq)	140x140mm (5.51"x5.51")	169.5mm (6.67")	125x125mm (4.92"x4.92")



DRIVER ENCLOSURE

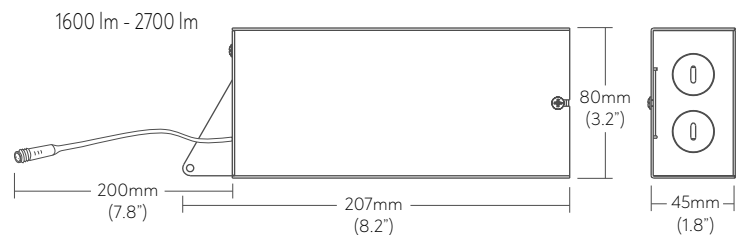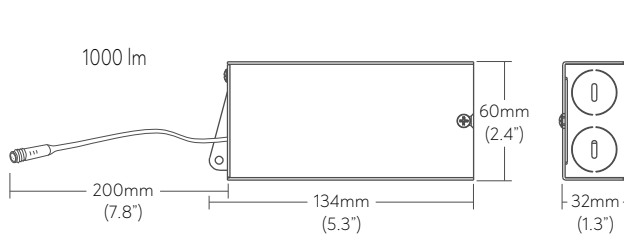

REFLECTOR - TILT



Round Reflector
Tilt: Fixed 0°



Round Reflector
Tilt: Adjustable 0° - 30°



Square Reflector
Tilt: Adjustable 0° - 30°

[TRIM]



[ORDER CODE]

MODULE					DRIVER			
			90			UNV		
COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS	DIMMING	VOLTAGE		
EURO3 - VEN3 EURO4 - VEN4 EURO6 - VEN6	55D - 55° (Standard) 24D - 24° 38D - 38°	30K - 3000K 35K - 3500K 40K - 4000K Consult factory for other CCT	90 - 90CRI	10 - 1000lm ¹ (EURO3 Standard) 19 - 1900lm ² (EURO4 Standard) 16 - 1600lm ² (EURO4) 22 - 2200lm ³ (EURO6) 27 - 2700lm ³ (EURO6)	V - 0-10V DIMMING (20W-34W) T - PHASE DIMMING (15W ONLY) X - DUAL 0-10V & PHASE DIMMING (Consult Factory)	UNV - 120-277V		
						* Nominal size 1. Available for 3" models only 2. Available for 4" models only 3. Available for 6" models only 4. Not available for square trim 5. Not available for wall wash 6. Not available for 6" models 7. Not applicable to wall wash 8. Not available for trimless or wall wash		
TRIM						OPTIONS		
					1			
MODEL	TILT	TRIM	REFLECTOR	TRIM FINISH	# OF HEADS	IP	MEDIA FILTER	NEW CONSTRUCTION PLATFORM
VEN3 - VENICE 3 INCH* VEN4 - VENICE 4 INCH* VEN6 - VENICE 6 INCH*	F - FIXED ^{1,4} AD - ADJUSTABLE WW - WALL WASH ¹	R - ROUND SQ - SQUARE RT - ROUND TRIMLESS ⁵ SQT - SQUARE TRIMLESS ^{1,5,6}	CS - CLEAR SPECULAR ⁷ (Standard) BC - BLACK CHROME ⁷ (Anti-glare) (BLANK) - WALL WASH	WH - WHITE (Standard) BK - BLACK* SV - SILVER*	1 - 1 HEAD	WL03 - WET' LOCATION (VEN3) (Consult Factory)	HC - HONEYCOMB SL - SOFT LENS	(BLANK) - NONE NCR1 - ADJUSTABLE 2" - 6" ROUND NCS1 - ADJUSTABLE 2" - 6" SQUARE

ORDER CODE CHART

ROUND TRIM

COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS/ WATTS	DIMMING	VOLTAGE	TRIM MODEL	TILT	TRIM	REFLECTOR	FINISH	# OF HEADS
	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1000 lm/15W	10-100%	120-277V	VEN3	FIXED, ADJUSTABLE	ROUND, ROUND TRIMLESS	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1900 lm/25W (Standard), 1600 lm/20W	0-10V (Standard), DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	VEN4	ADJUSTABLE	ROUND, ROUND TRIMLESS	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
	55°, 24°, 38°	3000K, 3500K, 4000K	>90Ra	2200 lm/ 28W, 2700 lm/34W	0-10V, DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	VEN6	ADJUSTABLE	ROUND, ROUND TRIMLESS	CLEAR SPECULAR, BLACK CHROME (Anti-glare)	WHITE, BLACK, SILVER	1

SQUARE TRIM

COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS/ WATTS	DIMMING	VOLTAGE	TRIM MODEL	TILT	TRIM	REFLECTOR	FINISH	# OF HEADS
	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1000 lm/15W	10-100%	120-277V	VEN3	ADJUSTABLE	SQUARE, SQUARE TRIMLESS	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1900 lm/25W (Standard), 1600 lm/20W	0-10V (Standard), DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	VEN4	ADJUSTABLE	SQUARE	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
	55°, 24°, 38°	3000K, 3500K, 4000K	>90Ra	2200 lm/ 28W, 2700 lm/34W	0-10V, DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	VEN6	ADJUSTABLE	SQUARE	CLEAR SPECULAR, BLACK CHROME (Anti-glare)	WHITE, BLACK, SILVER	1

WALL WASH

COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS/ WATTS	DIMMING	VOLTAGE	TRIM MODEL	TILT	TRIM	REFLECTOR	FINISH	# OF HEADS
	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1000 lm/15W	10-100%	120-277V	VEN3	WALL WASH	ROUND, SQUARE	NA	WHITE	1